


PUBLIC ADDRESS / ATTENUATORS / LOW IMPEDANCE

DOT-210ST

LOW-IMPEDANCE STEREO ATTENUATOR

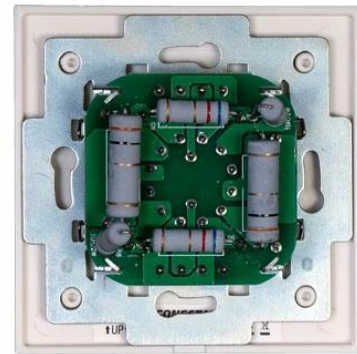

- ✓ For 100 V line installations
- ✓ For universal standard case
- ✓ 6 position ergonomic potentiometer with switch off
- ✓ Minimalist aesthetic

ESPECIALLY RECOMMENDED IN:



All sectors



+ Info:
<https://fonestar.com/DOT-210ST>

DESCRIPTION

Low impedance stereo attenuator for flush or surface mounting.

Minimalist aesthetics, with FONESTAR's own design, taking into account the needs of the market to make them go unnoticed in any installation, whether domestic or professional.

Ergonomically designed 6-position potentiometer with switch-off, which allows for easy handling.

Thanks to their standard dimensions, they can be fitted with universal square and round boxes for plasterboard partition walls (plasterboard). They can also be surface mounted in conjunction with the surface mounting boxes mod. DOT-BOX, available in black or white.

The entire range is supplied in white, however, for installations requiring black attenuators, the black panel mod can be purchased separately. DOT-01N, easily interchangeable with white.





Perfect for public address and voice evacuation systems, large and small shops, shopping centres, hotels, cafés, amusement arcades, home use, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Low impedance stereo attenuator for recessed or surface mounting.
POWER	10 + 10 W maximum
OUTPUTS	Low Z for 4-8 Ohm speakers
DIMENSIONS	Total: 83 x 83 x 43 mm depth Insert: 50 x 50 x 35 mm depth
CONTROLS	6 dimming positions and off switch
WEIGHT	0.1 kg
	For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX. Distance between screws: 60 mm



+ Info:
<https://fonestar.com/DOT-210ST>

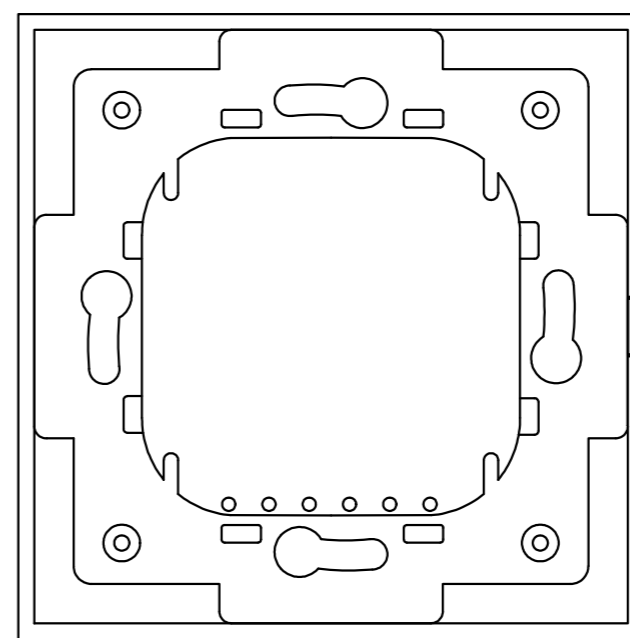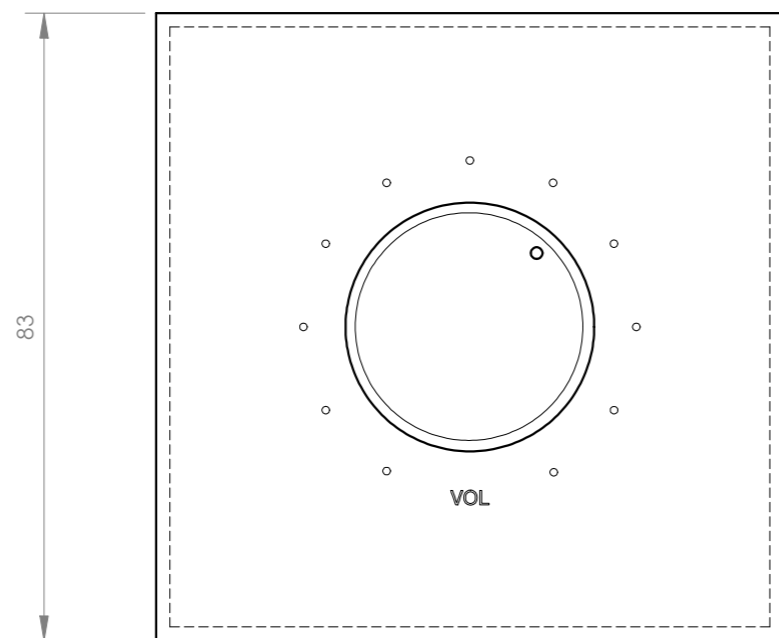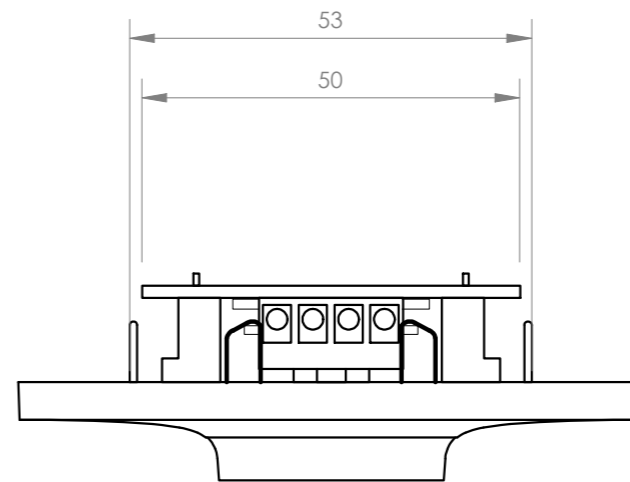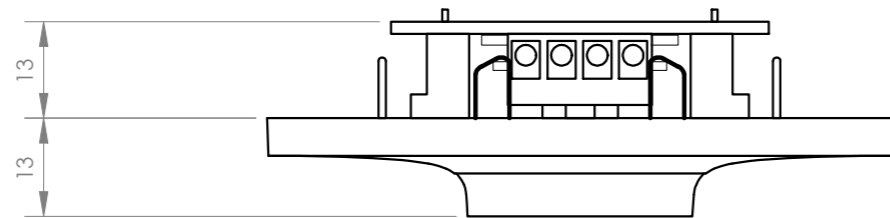

FONESTAR	Model	Description	Units	Scale
	DOT-210ST	LOW-IMPEDANCE STEREO ATTENUATOR	mm	1:1