

PUBLIC ADDRESS / AMPLIFIERS / MONO

PROX-15

PA SINGLE ZONE AMPLIFIER



- ✓ Excellent sound quality
- ✓ Modern and discreet design
- ✓ USB/FM player
- ✓ Compact size, for desktop use
- ✓ Secure, easy-to-connect euroblock connectors

ESPECIALLY RECOMMENDED IN:



+ Info:
<https://fonestar.com/PROX-15>



+ Info:
<https://fonestar.com/PROX-15>

All sectors



+ Info:

<https://fonestar.com/PROX-15>

DESCRIPTION

Public address amplifier with USB/FM Player

A perfect solution integrating amplifier, mixer, player, microphone and auxiliary inputs in a single unit, for PA installations with 100 V or low impedance loudspeakers requiring intuitive operation on a tight budget.

Secure, easy-to-connect euroblock connectors.

Excellent sound quality.

Modern and discreet design.

Compact size, for desktop use or surface anchorage.

Perfect for PA and piped music systems with 100 V or low-impedance line. Commercial premises, educational establishments, public address vehicles, monuments, exhibitions, bars, restaurants, etc.

TECHNICAL CHARACTERISTICS

FEATURES	<p>Public address amplifier. USB/FM player. Microphone input with mix, gain and priority level control. Tone controls. 100 V and 4 Ohm outputs. Mounting on vehicles and desktop.</p>
POWER	<p>15 W RMS</p>
RESPONSE	<p>20-20,000 Hz \pm 3 dB</p>
DISTORTION	<p>Harmonic: <1% at 1 kHz</p>
INPUTS	<p>1 balanced / unbalanced mic, euroblock / 6.3 mm jack, 600 Ohm 6 mV RMS 1 auxiliary, euroblock / 2 x RCA, 47,000 Ohm 300 mV RMS 1 line 100 V, euroblock</p>
FUNCTIONS	<p>Input priority. 100V Emergency input with maximum priority, attenuates all other inputs. Mute by contact closure, attenuates all inputs except the 100V Emergency input. Microphone with priority over Aux and Player inputs, by signal level, selectable. Power on, protection, signal peak and output signal indicator lights Fanless induction cooling</p>




+ Info:
<https://fonestar.com/PROX-15>

CONTROLS	<p>Microphone volume Selected input volume Input selector USB/FM player controls Tone: bass and treble Microphone gain and priority</p>
PLAYER	<p>USB player with background music playback mode. When switched on, automatically starts playback FM digital tuner with presets and automatic scanning Memory of last mode selected (USB or FM), last song played or last station tuned. Starts playing in successive order</p>
IMPEDANCE	<p>4 Ohm and 100 V line, euroblock</p>
POWER SUPPLY	<p>230/115 V AC, 50 W and 12 V DC, 15 W</p>
DIMENSIONS	<p>254 x 84 x 225 mm depth</p>
WEIGHT	<p>3.5 kg</p>
ACCESSORIES	<p>FM antenna</p>
OPTIONAL	<p>PROX-15SP: surface mount bracket</p>



+ Info:
<https://fonestar.com/PROX-15>

Frequency reponse

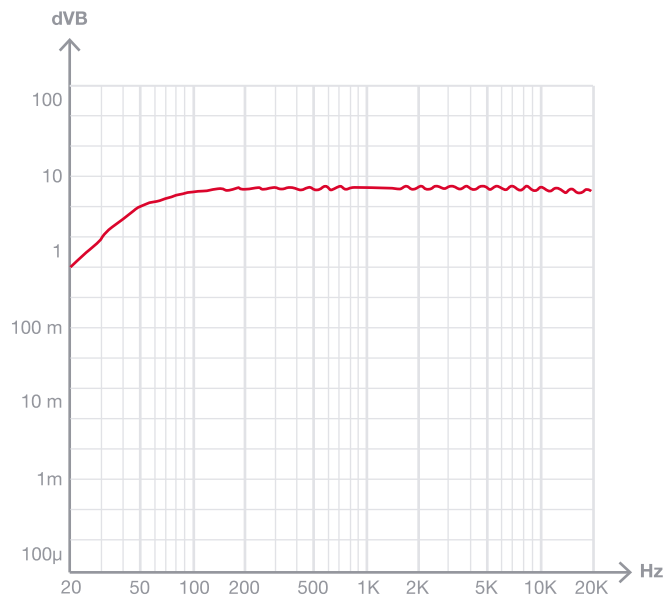

Block diagram

