




CONTROLS AND FUNCTIONS

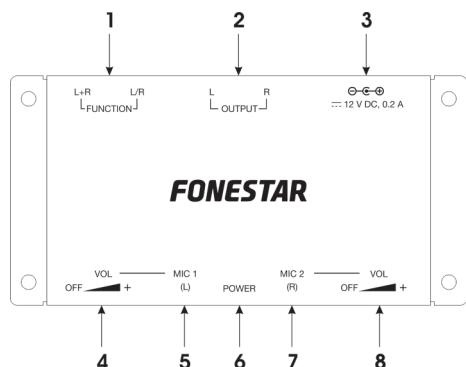

- 1.- **FUNCTION:** mixed output selector (L+R) or individual (L/R).
- 2.- **OUTPUT:** aux outputs, RCA connectors.
- 3.- Power supply input for mains adapter provided.
- 4.- Mic.1 input volume control.
- 5.- **MIC 1 (L):** mic.1 input, 6.3 mm jack connector.
- 6.- **POWER:** LED power indicator.
- 7.- **MIC 2 (R):** mic. 2 input, 6.3 mm jack connector.
- 8.- Mic. 2 input volume control.

CONNECTION

- Connect the dynamic microphones to the mic. inputs.
- Connect the line level devices to the RCA outputs.
- Select the output function (individual or mixed).
- Power the preamplifier with the mains adapter provided.
- Select the required level in the inputs with the corresponding volume controls.

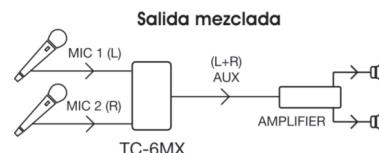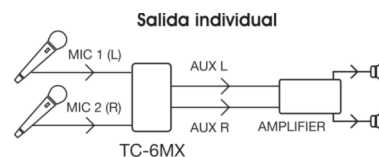

TECHNICAL SPECIFICATIONS

	TC-6MX
CHARACTERISTICS	Microphone to aux preamplifier. Individual volume control in each channel. Individual or mixed output selection.
INPUTS	2 mics., 6.3 mm mono jack, 600 Ω 7 mV maximum
OUTPUTS	2 aux, RCA 47,000 Ω 1.6 V
RESPONSE	20-20,000 Hz
S/N RATIO	> 80 dB
GAIN	50 dB
POWER SUPPLY	12 V DC, 0.2 A with adapter included
DIMENSIONS	133 x 31 x 85 mm depth

DECLARATION OF CONFORMITY

FONESTAR SISTEMAS S.A.
Polígono de Trascueto s/n
39600 Revilla de Camargo, Cantabria (Spain)

Declares, under its responsibility, that the following equipment:

Description: Microphone to aux preamplifier
Brand: FONESTAR
Model: TC-6MX

complies with the European Community directives 2004/108/EC on Electromagnetic Compatibility, 2006/95/EC on Low Voltage and 2011/65/EU on the restriction on the use of certain dangerous substances in electrical and electronic appliances (RoHS).

Revilla de Camargo, 28th April 2016

Juan Vallejo
Technical Engineer, Sales Department

WARRANTY

This product has been tested and has passed the corresponding quality control prior to being put on the market. **FONESTAR** guarantees the suitability of the product for its specified use during a period of 2 years from the delivery date and commits itself to repair or substitute the goods as expressed in the Spanish law 'La Ley General para la Defensa de los Consumidores y Usuarios, Real Decreto Legislativo 1/2007 16 Noviembre.

The lack of conformity in the first six months after purchase, due to a manufacturing defect, will be rectified with no more than showing the proof of purchase. After six months **FONESTAR** reserves the right to demand proof of the product being sold with that problem.

This warranty does not include damage produced by: inappropriate use or negligence, accidents, worn out parts due to use, breakages, burns, spilt liquids or other substances, excessive humidity, battery deterioration and internal manipulation of the device, the software or its components by unauthorized persons, and in general any use that is unrelated to the nature and purpose of the product.

If any service is needed during the warranty period because of lack of conformity, please contact the business or distributor where the product was purchased in no more than 2 months after being conscious of the problem. It is only necessary to contact **FONESTAR** if it is impossible or imposes an undue burden for them to solve it. To benefit from this warranty it is necessary to show the proof of purchase with the date clearly visible, with no corrections or crossing out.

This document adds information, and never decreases the consumers' rights, which in all cases are protected by the Spanish law 'La Ley General para la Defensa de los Consumidores y Usuarios, Real Decreto Legislativo 1/2007 16 Noviembre.