


ZS-1112R

10 ZONE CONTROL UNIT FOR DIMMER PRIORITY ACTIVATION WITH 24 V RELAY.

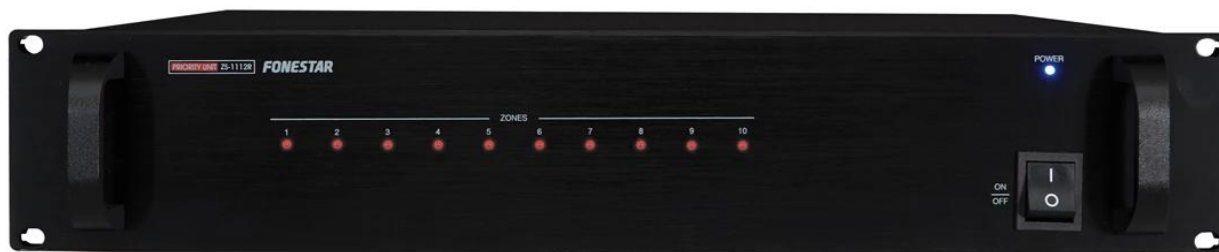

- ✓ High reliability
- ✓ Expandable to 300 zones.
- ✓ Cat 5e cable connection
- ✓ RS-485 communication

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

10 zone control unit for priority activation in attenuators with 24 V relay.

TECHNICAL CHARACTERISTICS

FEATURES

10-zone control unit for priority activation of dimmers with 24 V relay.
Expandable to 300 zones.
Connection Cat 5e cable, RS-485 communication that can reach up to 1000 metres.
ZS-1112R
Works alongside the ZSC-1110 alarm control unit. It activates the 24 V priority for dimmers when there is a message sent from the ZS-11 microphone.
The ALARM-IN function has no automatic reset. It needs to be reset manually.



+ Info:
<https://fonestar.com/ZS-1112R>

INPUTS	1 zone extension, RJ-45 2 alarm activation through contact closure, screw terminals
OUTPUTS	10 24 V for relay activation in attenuators, screw terminals 1 zone extension, RJ-45 2 alarms through contact closure, screw terminals
POWER SUPPLY	230 V AC, 220 W
DIMENSIONS	484 x 88 x 303 mm depth. 2 U 19" rack
WEIGHT	6.2 kg



+ Info:
<https://fonestar.com/ZS-1112R>