


PUBLIC ADDRESS / LOUDSPEAKERS / CEILING

GAT-80SW

100 V LINE TRANSFORMER CEILING SUBWOOFER SPEAKER

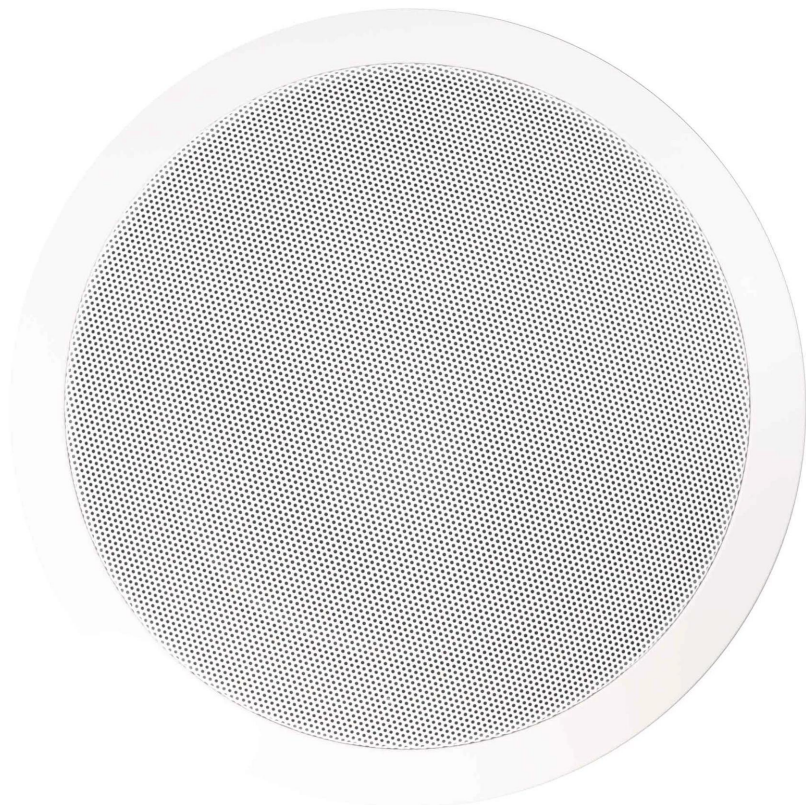

- ✓ Excellent sound quality
- ✓ Anchorage installation system

ESPECIALLY RECOMMENDED IN:



All sectors



+ Info:

<https://fonestar.com/GAT-80SW>

DESCRIPTION

Subwoofer ceiling speaker

Perfect for bass reinforcement in installations with musical ambience.

It delivers great power with deep bass.

ABS built and protective steel grille that guarantees its integrity.

Its simple anchor installation system minimises assembly time, with the screws being completely hidden behind the grille.

Bass reinforcement for musical ambience of 100 V line installations in shops, bars, restaurants, etc.

TECHNICAL CHARACTERISTICS

| | |
|--------------|---|
| FEATURES | Ceiling subwoofer, with 100 V line transformer and round grille. Bass reinforcement in 100 V line installations. |
| POWER | 90 W maximum, 60 W RMS |
| LOUDSPEAKERS | 1 X 8" woofer |
| RESPONSE | 55-200 Hz -10 dB at 1W/1m |
| IMPEDANCE | 60 W RMS@100V (166 Ohm) 40 W RMS@100V (250 Ohm) 20 W RMS@100V (500 Ohm) |
| SENSITIVITY | 89 dB at 1 W/1 m |
| CROSSOVER | Low-pass filter, 12 dB/oct. |
| MATERIAL | ABS and steel grille |
| COLOUR | Greyish white (RAL 9003, RAL 7047) |



+ Info:

<https://fonestar.com/GAT-80SW>

| | |
|------------|----------------------------------|
| DIMENSIONS | 272 mm Ø x 110 mm depth |
| HOLE | 240 mm Ø |
| WEIGHT | 2.6 kg |
| | Installation system with catches |



+ Info:
<https://fonestar.com/GAT-80SW>