


AV MULTIMEDIA / DISTRIBUTORS / HDMI

FO-22S4ED

1 X 4 HDMI AMPLIFIER SPLITTER.

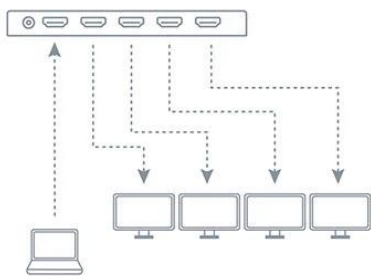

- ✓ Allocates HDMI signals (1 input to 4 outputs)
- ✓ UHD 4K@60Hz resolution
- ✓ Downscaler and EDID function
- ✓ 2.0 HDMI
- ✓ HDCP 2.2



+ Info:
<https://fonestar.com/FO-22S4ED>

ESPECIALLY RECOMMENDED IN:



Hospitality



Education



Offices



All sectors

DESCRIPTION

HDMI 2.0 splitter (1 input x 4 outputs). Distribute the same image on multiple TVs. The same video and audio content can be shown on different TVs to be seen by more people. In addition, you can distribute the signal to TVs of different resolutions, thanks to the DOWN-SCALING function that automatically adjusts the output signal to the TV resolution. For installations where multiple TVs are needed for the audience such as exhibitions, shop displays, training rooms, conference rooms, sports centres, bars, restaurants, etc.




TECHNICAL CHARACTERISTICS

FEATURES	1x4 HDMI 2.0 amplifier splitter. UHD 4K@60Hz resolution. 18 Gbps bandwidth. DOWN-SCALING function on outputs (Auto adjustment for the resolution of each TV. Simultaneously provides 4K and 1080p outputs). Intelligent EDID management, automatic or manual selection.
HDMI	2.0, compatible with 1.4
HDCP	2.2, compatible with 1.4
DELAY	0 ms
INPUTS	1 x HDMI female gold-plated connector
OUTPUTS	4 x HDMI female gold-plated connectors
INDICATORS	Operating LED Output LED Operating mode LED
POWER SUPPLY	5 V DC, 1 A with adapter included
DIMENSIONS	136 x 14 x 61 mm depth
WEIGHT	0.15 kg
NOTES	The cable must be HDMI 2.0. Maximum cable length is 5m for 4K@60Hz 4:4:4 or 10m for 4K@30Hz or 1080p.



+ Info:

<https://fonestar.com/FO-22S4ED>

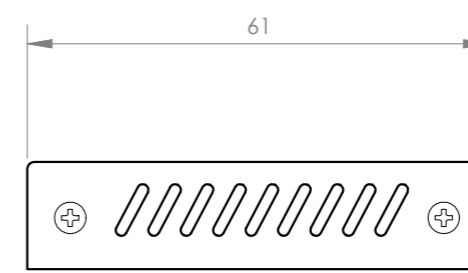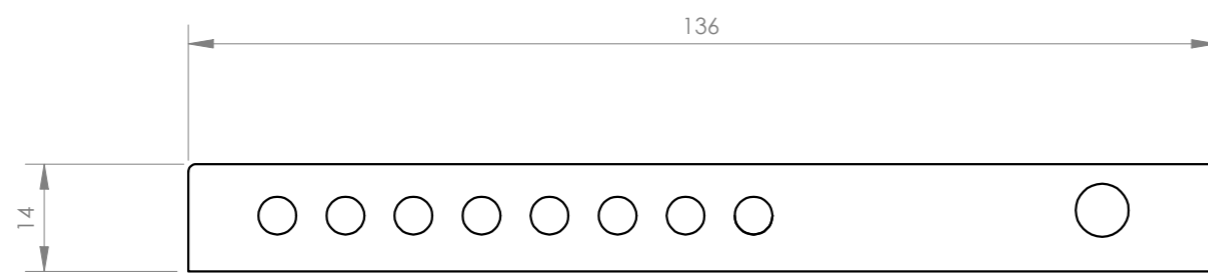

FONESTAR	Model	Description	Units	Scale
	FO-22S4ED	1 X 4 HDMI AMPLIFIER SPLITTER	mm	1:1