




L O U D
OF SWEDEN

Wireless Speaker S2

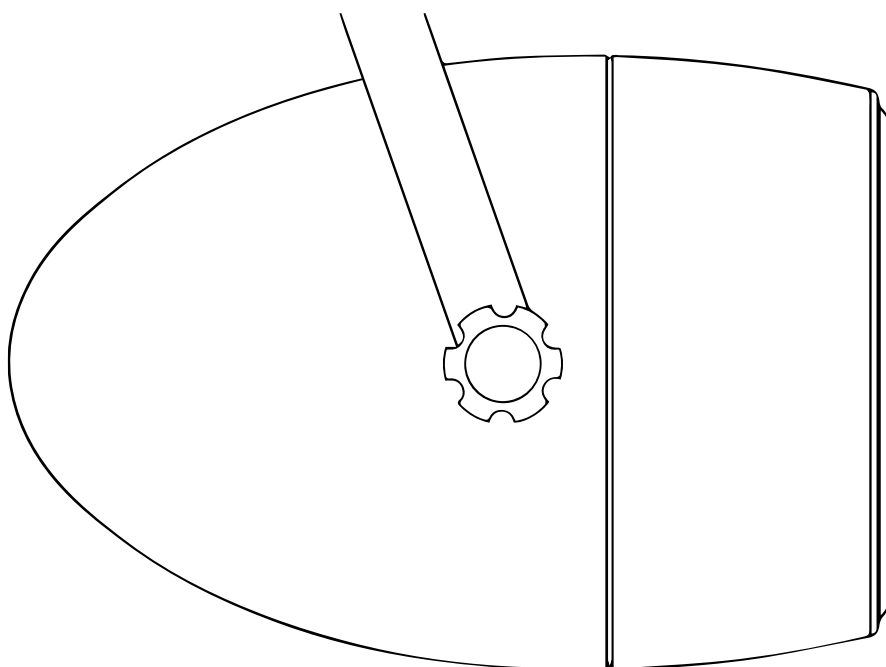

45 - 18 000 Hz

Wireless Local Gateway 2.0

Coaxial driver with 0.75" soft dome tweeter

4,5" Neodymium woofer

HIFI graded

Global 3-phase adapter for trackmount included

50 channels, digital RF encrypted

4 individual volume zones, A, B, C, D

Pairing system

Mains voltage

Input: 110-240V AC

Power consumption, operation

Maximum 22 W

Operating wireless frequency

1.9 GHz DECT, Wireless Local Gateway 2.0

Frequency range

45 - 18 000 Hz

Power rating RMS

Sensitivity

Input

Wireless Local Gateway 2.0

Input

Unbalanced 3,5 mm aux

Line out

Unbalanced 3,5 mm aux

Weight

1525g

Width

160 mm

Depth

220 mm

Height

160 mm

Colour

White, black