


System Speaker 1 connection example

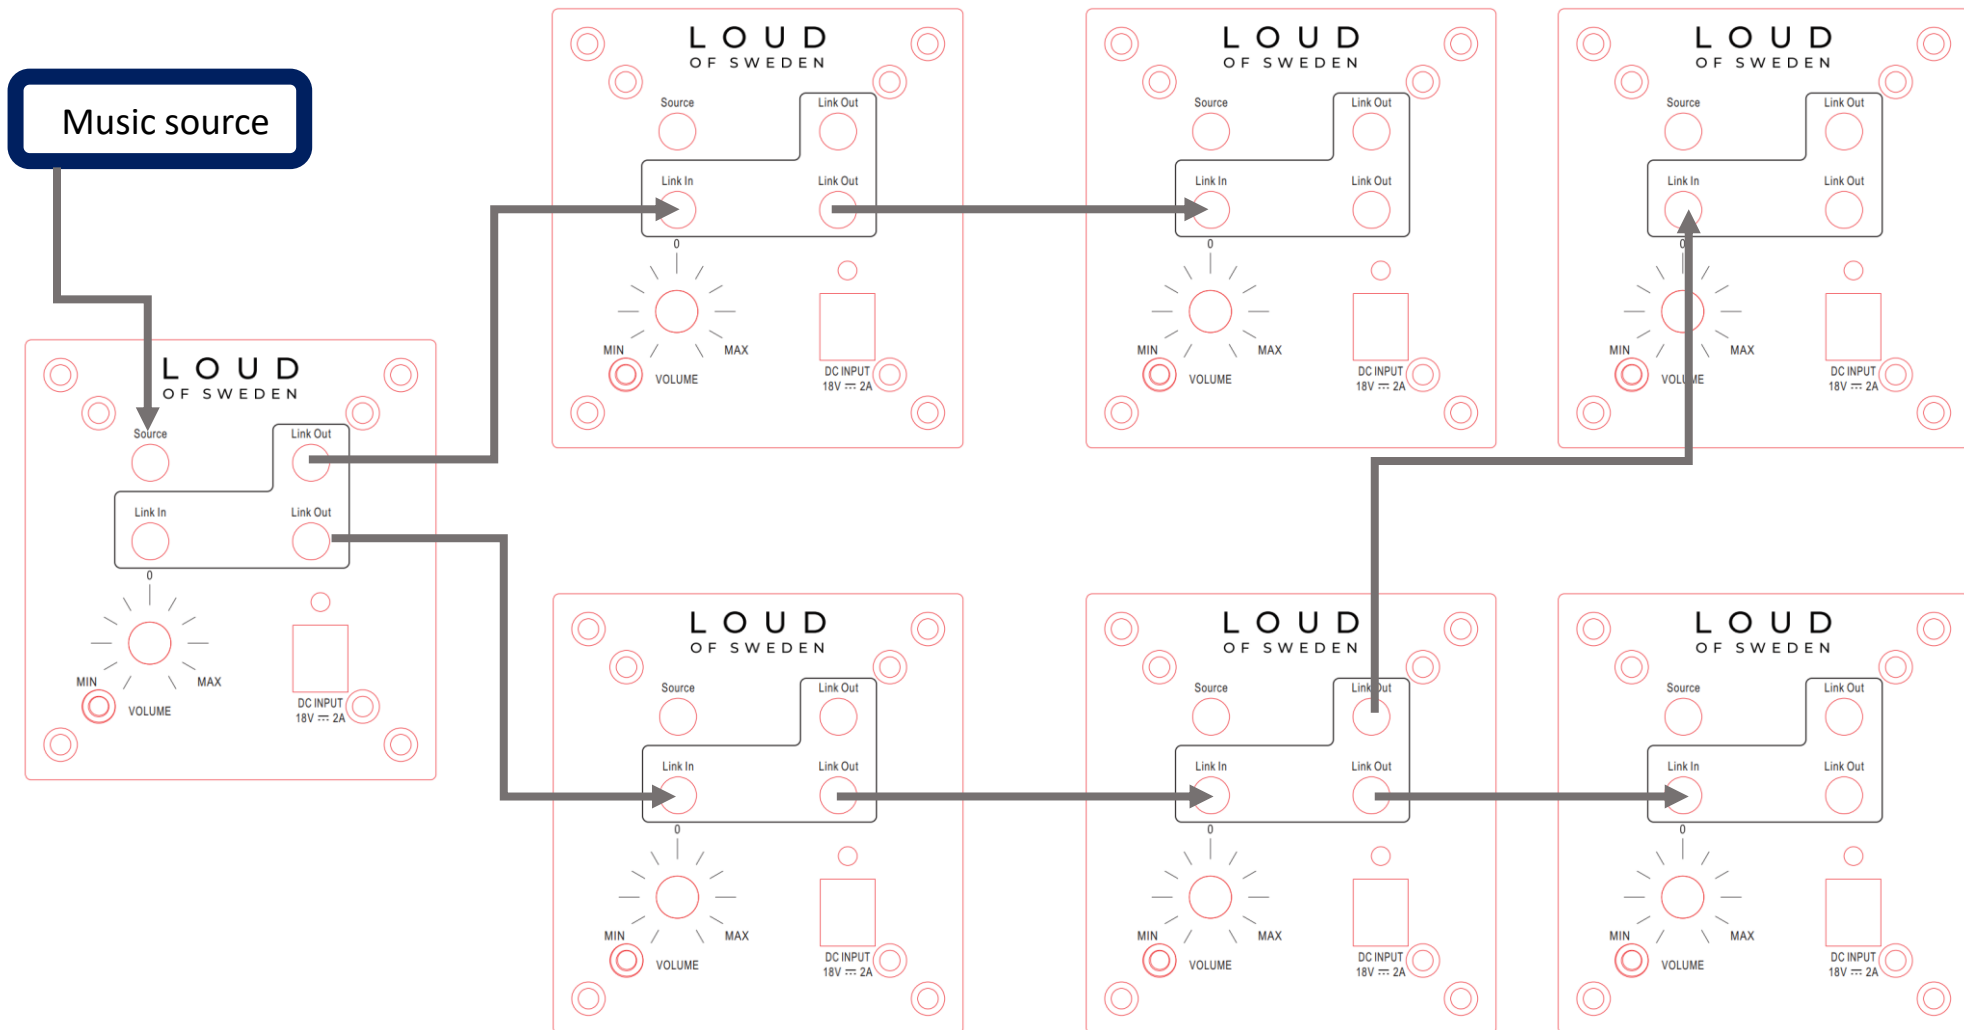

Specifications

Type: Active speaker with bass reflex

Amplifier: Digital Class D amplifier with integrated DSP and Dynamic Bass function

Power: 2 x 20W

Tweeter: 2 x 0,75" textile dome tweeter

Mid/Woofer: 4 x 2"

Frequency range: 50 – 20000Hz

Crossover frequency: 4.200Hz

Dimensions HxWxD: 238x320x167

Power adapter: 18V, 2A

Inputs: 3,5mm analog input

Link in / out: balanced connections using 3,5mm stereo cable, ONLY for linking SS1 speakers

Power consumption STB / ON: <0.5W / 4.2W

