

MICROPHONE / DESKTOP MICROPHONE / CONDENSER

MICSET-C32

UNIDIRECTIONAL ELECTRET CONDENSER DESKTOP MICROPHONE



- ✓ Crystal clear voice pick-up
- ✓ 5 m cable with XLR female 3 pin connector to XLR male 3 pin connector
- ✓ Bass-cut filter/ Flat response. Cut-off at 80 Hz



+ Info:
<https://fonestar.com/MICSET-C32>

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

Desktop electret condenser microphone MICSET-C32: Precision and versatility in every word

The MICSET-C32 is a unidirectional electret condenser microphone designed specifically for professional installations requiring clear and accurate voice pick-up. With a sturdy desktop base and flexible design, this microphone is perfectly suited for conferences, meetings and corporate environments, offering superior sound quality.

Clear and configurable capture

Unidirectional electret condenser capsule ensures accurate pick-up, minimising background noise and focusing on the user's voice.

Frequency range from 55 Hz to 20,000 Hz, ideal for clear and natural voice reproduction.

The 3-position switch (ON-OFF/PTT/PTM) makes it easy to use in different scenarios, allowing the user to choose between keeping the microphone on, temporarily on or off.

Durability and adaptability

3-pin XLR connection ensures a balanced and stable signal to avoid interference and is compatible with a wide range of sound systems.

Low-cut filter allows the frequency response to be adjusted to eliminate unwanted noise, ideal for environments with background noise.

Phantom power from 9 to 52 V, making it versatile and compatible with a variety of professional sound installations.

Why choose MICSET-C32?

The MICSET-C32 is the perfect solution for sound system integrators and installers who need a robust desktop microphone with professional features. Its flexibility, sound quality and ease of use make it an indispensable choice for any audio installation, whether in conference rooms, auditoriums or corporate events.

TECHNICAL CHARACTERISTICS

CAPSULE

Unidirectional electret condenser



+ Info:

<https://fonestar.com/MICSET-C32>


RESPONSE	55-20,000 Hz
SENSITIVITY	-32 dB \pm 3 dB (V/Pa) at 1 kHz
IMPEDANCE	675 Ohm
SPL MAX	128 dB
EQUIVALENT NOISE	34 dB
DYNAMIC RANGE	94 dB
DISTORTION (THD)	<1 %
SNR	60 dB
CLIPPING LEVEL	- 6 dBV
SWITCH	Mic: 3 positions ON-OFF/PTT/PTM Filter: Low cut/ Flat response - Cut-off at 80 Hz
POWER SUPPLY	9 to 52 V DC phantom
INDICATORS	LED power indicator
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
CONNECTORS	Output: XLR male 3 pin, line balanced
DIMENSIONS	Gooseneck: 32 cm height Desktop base: 93 x 46 x 122 mm depth
WEIGHT	0.59 kg
ACCESSORIES	Windshield foam 5 m cable with 3-pin XLR female connector to 3-pin XLR male connector



+ Info:
<https://fonestar.com/MICSET-C32>

Output Response(Test Mic) - Input1

● 1kHz

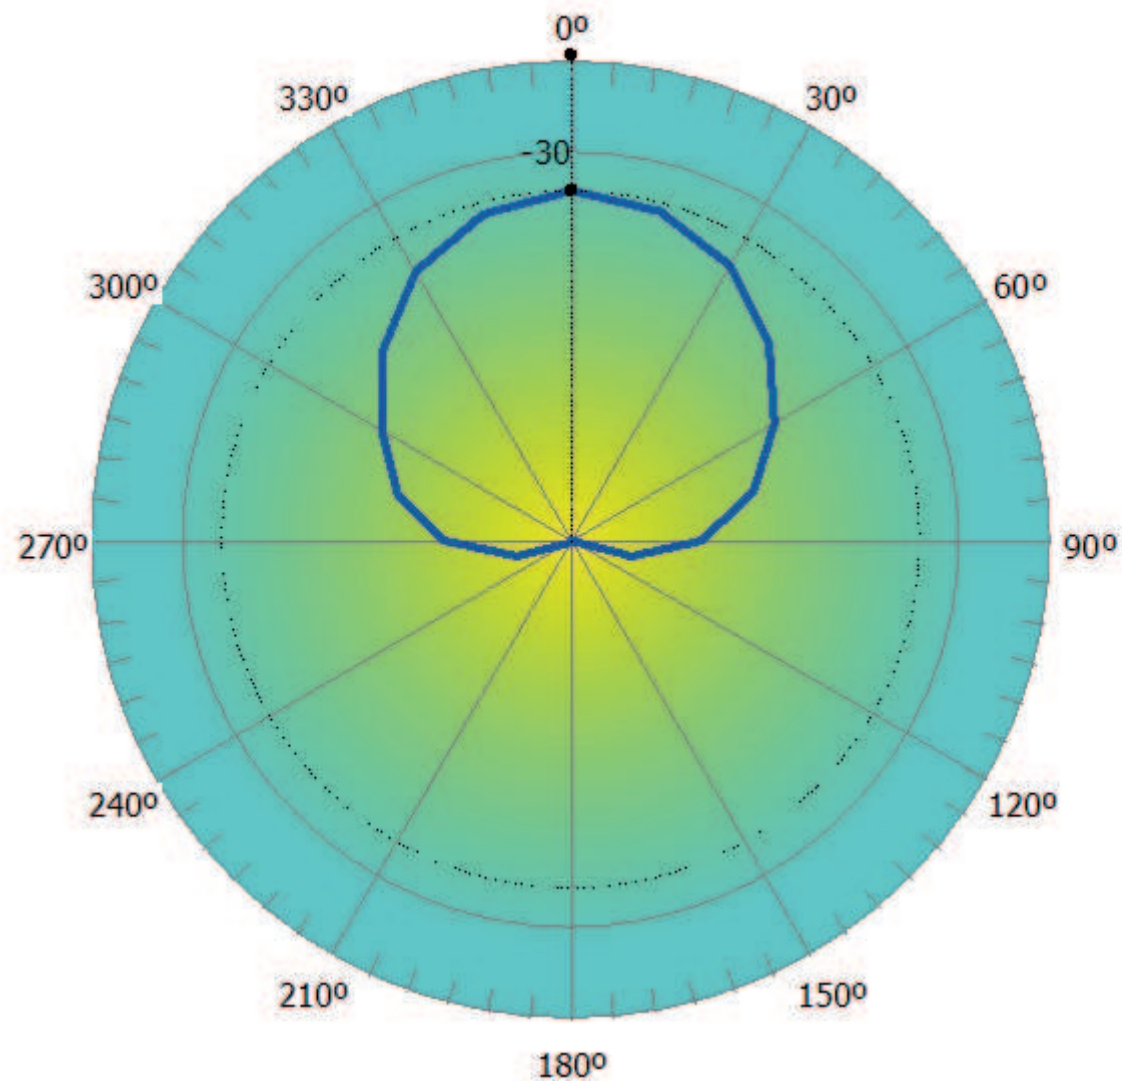

Cursor values

Frequency : 1kHz

Magnitude : -32.032 dB/1 V

Angle : 0 Deg.

Product:
MICSET-C32 + MICSET-C32LED + MICSET-C45
Polar Diagram

Date: 2025-01-09

FONESTAR
www.fonestar.es