

MICROPHONE / DESKTOP MICROPHONE / DYNAMIC

## MICSET-D32J

UNIDIRECTIONAL DYNAMIC DESKTOP MICROPHONE

























Crystal clear voice pick-up



1.5 m cable with 6.3 mm jack connector



Great max. SPL



+ Info:

https://fonestar.com/MICSET-D32J



ESPECIALLY RECOMMENDED IN:



All sectors

## **DESCRIPTION**

Dynamic desktop microphone with adjustable gooseneck for professional applications

The MICSET-D32J is a unidirectional dynamic microphone designed for public address and communication applications in professional environments. With a desktop design, its 32 cm gooseneck allows for a comfortable and precise fit in conference, presentation or work environments. Its robust construction and high-quality capsule ensure clear and accurate sound capture.

High-quality sound in any environment

Sound accuracy: With a frequency response of 100-15,000 Hz and a sensitivity of -55 dB, this microphone picks up speech clearly, minimising unwanted background noise.

Strong and durable: Its structure withstands intensive use in demanding environments, with the ability to operate at temperatures from -20 °C to 50 °C and withstand up to 90 % relative humidity.

Practicality: It features an ON-OFF/PTT button for easy sound control and a 6.3 mm jack plug for quick connection to sound systems.

Why choose MICSET-D32J?

This microphone is ideal for integrators and installers who need reliable equipment with a dynamic range of 78 dB and a maximum SPL of 110 dB, ensuring a clear and distortion-free transmission. Its 1.5 m cable and compact 93 x 46 x 122 mm design make it perfect for discreet but effective installations.

## **TECHNICAL CHARACTERISTICS**

CAPSULE	Unidirectional dynamic
RESPONSE	100-15,000 Hz
SENSITIVITY	-55 dB $\pm 3$ dB (V/Pa) at 1 kHz
IMPEDANCE	600 Ohm
SPL MAX	110 dB
EQUIVALENT NOISE	32 dB
DYNAMIC RANGE	78 dB



+ Info:

https://fonestar.com/MICSET-D32J

**FONESTAR** 

Poligono Trascueto. 39600 Revilla de Camargo. Cantabria (España)




DISTORTION (THD)	<1 %
SNR	75 dB
PUSH BUTTON	ON-OFF/PTT
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
CONNECTORS	6.3 mm mono jack
DIMENSIONS	Gooseneck: 32 cm high Desktop base: 93 x 46 x 122 mm depth
CABLE	1.5 m with 6.3 mm mono jack connector Unbalanced line
WEIGHT	0.62 kg



+ Info:

https://fonestar.com/MICSET-D32J

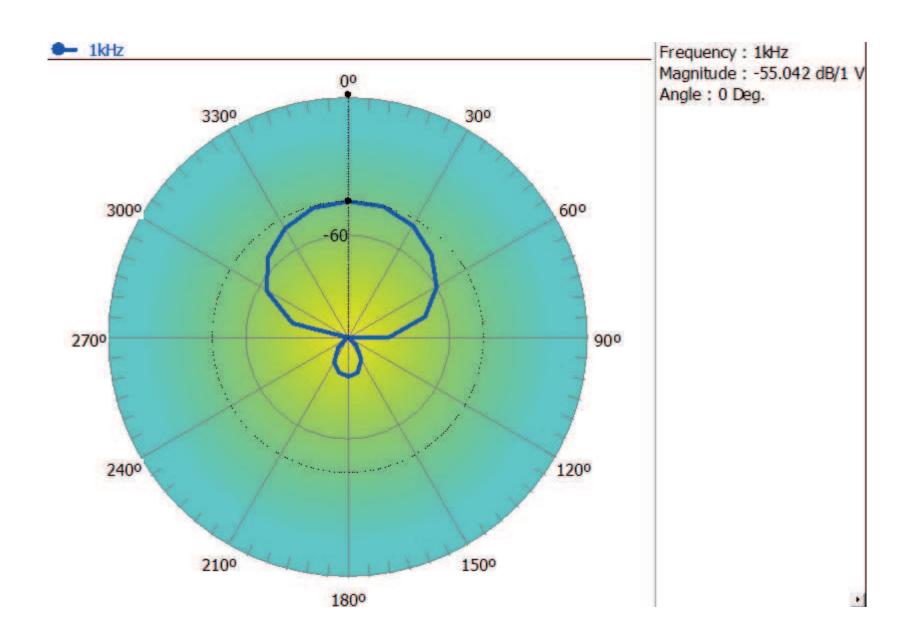

Product:

MICSET-D32XLR + MICSET-D32J + MICSET-D32JSE Polar Diagram

Date: 2025-01-09

