


PUBLIC ADDRESS / PUBLIC ADDRESS ACCESSORIES / TRANSFORMERS

CV-1720

100 V LINE TRANSFORMERS FOR LOW IMPEDANCE LOUDSPEAKERS

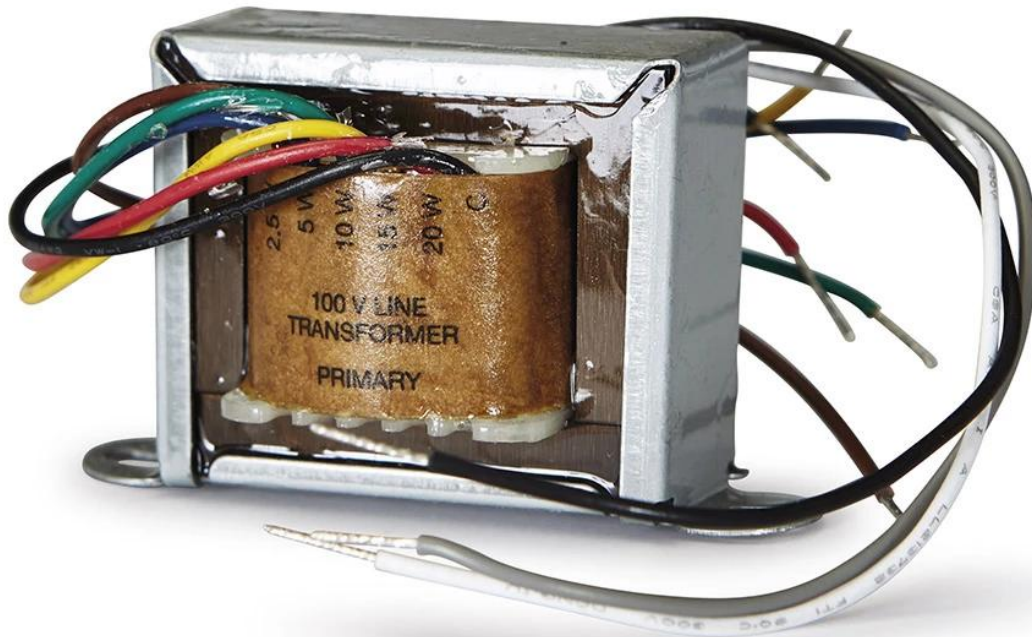

- ✓ Z 100 V high input
- ✓ Z 4-8 Ω low output

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

100 V line transformer for low impedance loudspeakers.



+ Info:
<https://fonestar.com/CV-1720>

TECHNICAL CHARACTERISTICS

POWER	100 V line: 20, 15, 10, 5, 2.5 W
IMPEDANCE	500, 670, 1000, 2000, 4000 Ohm
OUTPUTS	Low Z for 4-8 Ohm speakers
DIMENSIONS	A: 71mm, B: 60mm, C: 50mm, D: 42mm, E: 42mm.
WEIGHT	0.34 kg



+ Info:
<https://fonestar.com/CV-1720>