


PUBLIC ADDRESS / PUBLIC ADDRESS ACCESSORIES / TRANSFORMERS

# CV-175

100 V LINE TRANSFORMERS FOR LOW IMPEDANCE LOUDSPEAKERS

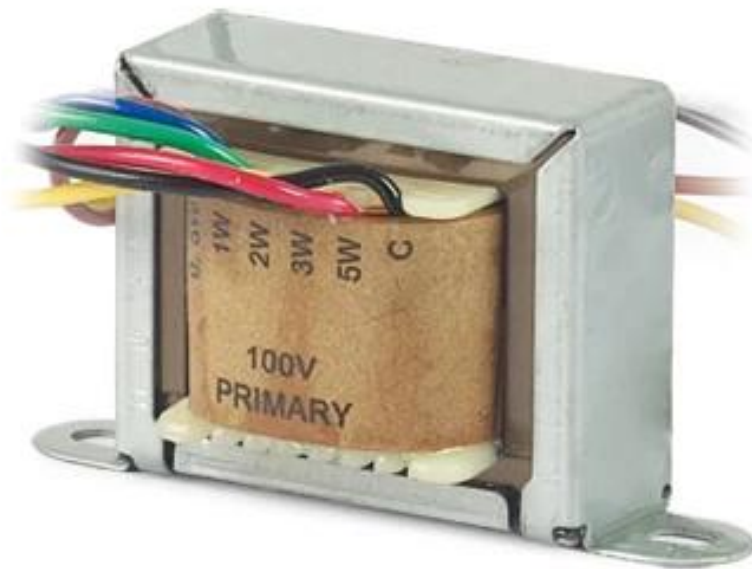

- ✓ Z 100 V high input
- ✓ Z 4-8 Ω low output

ESPECIALLY RECOMMENDED IN:



All sectors



+ Info:  
<https://fonestar.com/CV-175>

**DESCRIPTION**

100 V line transformer for low impedance loudspeakers.

**TECHNICAL CHARACTERISTICS**

POWER	100 V line: 5, 3, 2, 1, 0.5 W
IMPEDANCE	2,000, 3,333, 5,000, 10,000, 20,000 Ohm
OUTPUTS	Low Z for 4–8 Ohm speakers
DIMENSIONS	A: 62mm, B: 53mm, C: 43mm, D: 35mm, E: 34mm.
WEIGHT	0.2 kg



+ Info:  
<https://fonestar.com/CV-175>