


PUBLIC ADDRESS / PUBLIC ADDRESS ACCESSORIES / TRANSFORMERS

CV-1815W

100 V LINE TRANSFORMERS FOR LOW IMPEDANCE LOUDSPEAKERS, IP-65

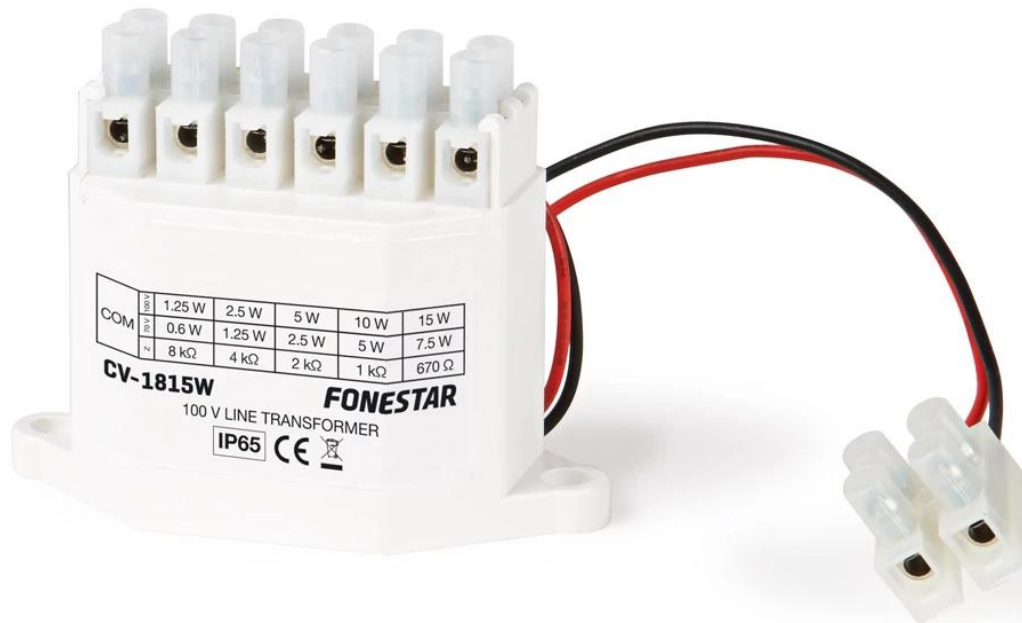

- ✓ Z 100 V high input
- ✓ Z 8 ? low output
- ✓ IP-65 protection

ESPECIALLY RECOMMENDED IN:



All sectors



+ Info:
<https://fonestar.com/CV-1815W>

DESCRIPTION

100 V line transformer for low impedance loudspeakers, IP-65.

TECHNICAL CHARACTERISTICS

POWER	100 V line: 15, 10, 5, 2.5, 1.25 W
IMPEDANCE	670,1,000, 2,000, 4,000, 8,000 Ohm
OUTPUTS	Low Z for 8 Ohm loudspeakers
DIMENSIONS	A: 72mm, B: 62mm, C: 51mm, D: 54mm, E: 35mm.
WEIGHT	0.2 kg
PROTECTION	IP-65



+ Info:

<https://fonestar.com/CV-1815W>