


PUBLIC ADDRESS / POWER AMPLIFIER / MULTI-CHANNEL

FSD-22D

DANTE EXPANSION MODULE

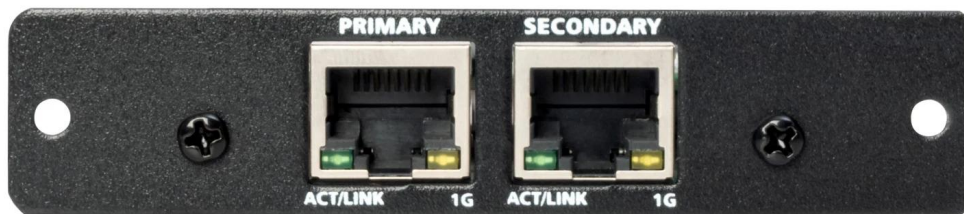

- ✓ DANTE expansion module
- ✓ 2 x 2 digital audio input/output
- ✓ Compatible with FSD-2150E and FSD-2500E public address power stages

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

DANTE expansion module

Expands the possibilities of the FSD-2150E and FSD-2500E PA power amplifiers by making them compatible with other DANTE devices and providing all the advantages that this technology offers.

One cable is enough. DANTE eliminates the heavy and expensive analogue cabling, replacing it with a cost-effective and readily available network cable, Cat 5e or Cat 6, preventing interference, noise, and distance limitation while creating an affordable, lightweight and simple solution.



+ Info:
<https://fonestar.com/FSD-22D>

It features all multimedia devices and control of the entire system via a single standard IP network. Easily expandable and very versatile as the network can be reconfigured at any time. It has a redundant network port, this avoids audio loss or interruption in case of connectivity problems in the primary network.
Device self-discovery.

Enables digital audio transfer between DANTE devices. Ideal for large multi-track installations, concerts, live performances, music recording studios, etc.

TECHNICAL CHARACTERISTICS

FEATURES	DANTE expansion module. Compatible with FSD-2150E and FSD-2500E PA power amplifiers. Connections via RJ-45 cable, Cat 5e. 2 DANTE ports, 2 x RJ-45 (Primary and Secondary) Device self-discovery.
CHANNELS	2 x 2 digital audio input/output
SAMPLE RATE	44.1 kHz, 48 kHz, 88.2 kHz and 96 kHz
BIT DEPTH	16, 24 and 32 bits
CONNECTION	RJ-45 cable, Cat 5e
LATENCY	1 ms
DIMENSIONS	96 x 20 x 88 mm depth
WEIGHT	0.12 kg



+ Info:
<https://fonestar.com/FSD-22D>